

Quick Pressure Relief Valve

Model 73Q


- Immediately eliminates pressure peaks
- Visual indication of system over pressure
- Filtration system burst protection
- Thermal expansion over-pressure relief
- System maintenance savings

The Model 73Q Quick Pressure Relief Valve is a hydraulically operated, diaphragm actuated control valve that relieves excessive system pressure when this pressure rises above the pre-set value. It immediately, accurately, and with high repeatability responds to system pressure rise by fully opening. The Model 73Q provides smooth drip tight closing.



Features and Benefits

- **Hydraulic actuation**
 - Independent operation
 - Long term drip-tight sealing
 - Long term setting stability
 - Wide setting range
 - Tight setting window
 - Minimal hysteresis
- **Double chamber design**
 - Moderated valve closing (no surges)
 - Protected diaphragm
- **Obstacle free, full bore** – Uncompromising reliability
- **Balanced seal disk** – High relief flow capacity
- **Manual test valve** – No setting change required



Operation


The Model 73Q is a pilot controlled valve equipped with an adjustable 2-Way pressure relief pilot.

The pilot internal restriction continuously allows flow from the main valve inlet into the upper control chamber [1]. The pilot [2] senses upstream pressure.

Should this pressure abruptly rise above pilot setting, the pilot opens, and pressure in the upper control chamber is vented, causing the main valve to immediately open, thereby relieving excessive system pressure.


When upstream pressure decreases to below pilot setting, the pilot closes, enabling pressure to accumulate in the upper control chamber, causing the main valve to smoothly close. Vented cock valve [3] is used to perform manual operating test.

For sizes 6-14" use pilot #3HC. For sizes 16" and larger, consult BERMAD.

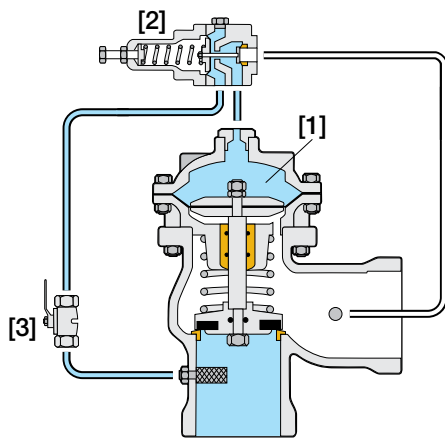

Valve Closed

(System pressure is below setting)

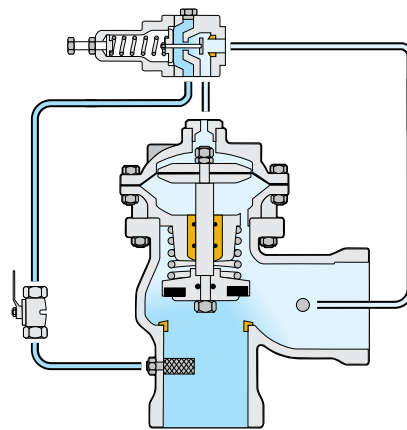

Valve Open

Pilot System Specifications

Standard Materials:

Pilot:

Body: Brass or Stainless Steel 316

Elastomers: Synthetic Rubber

Spring: Galvanized Steel or Stainless Steel

Tubing & Fittings:

Stainless Steel 316 or Copper & Brass

Accessories:

Stainless Steel 316, Brass and Synthetic

Rubber Elastomers

Pilot Adjustment Range:

1 to 7 bar ; 15 to 100 psi


1 to 12 bar ; 15 to 175 psi

1 to 16 bar ; 15 to 230 psi

5 to 25 bar ; 70 to 360 psi


Note:

- Maximum flow velocity: 0.3-15 m/sec ; 1-50 ft/sec



Typical Applications

Reduced Pressure Zone Safety Relief

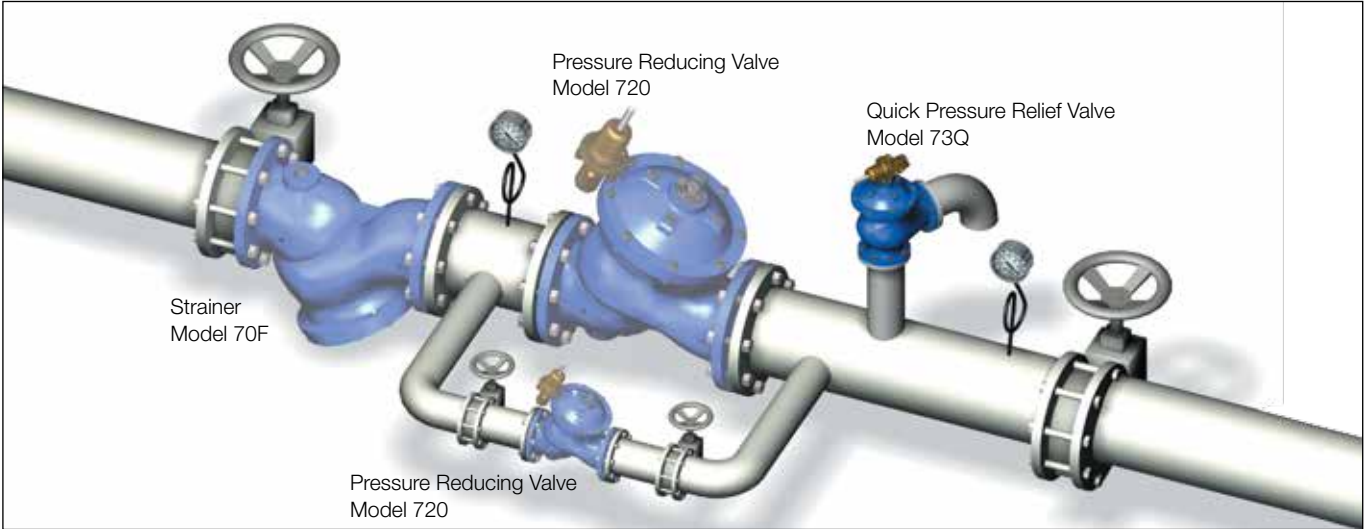


The Model 73Q Quick Pressure Relief Valve protects against:


- Momentary high pressure peaks
- Excessive pressure from another source
- Failure of other system components
- Static condition leaking of pressure reducing valves

Filtration System Safety Relief

Filter tanks, due to their large surface areas, are often the system components most vulnerable to abrupt pressure rise. The Model 73Q Quick Pressure Relief Valve protects against:

- Pressure peak at end of filling process
- Sudden pressure rise due to drop in demand
- Increased pressure due to blocked filtration element
- Over pressure due to flow direction switching during back flushing

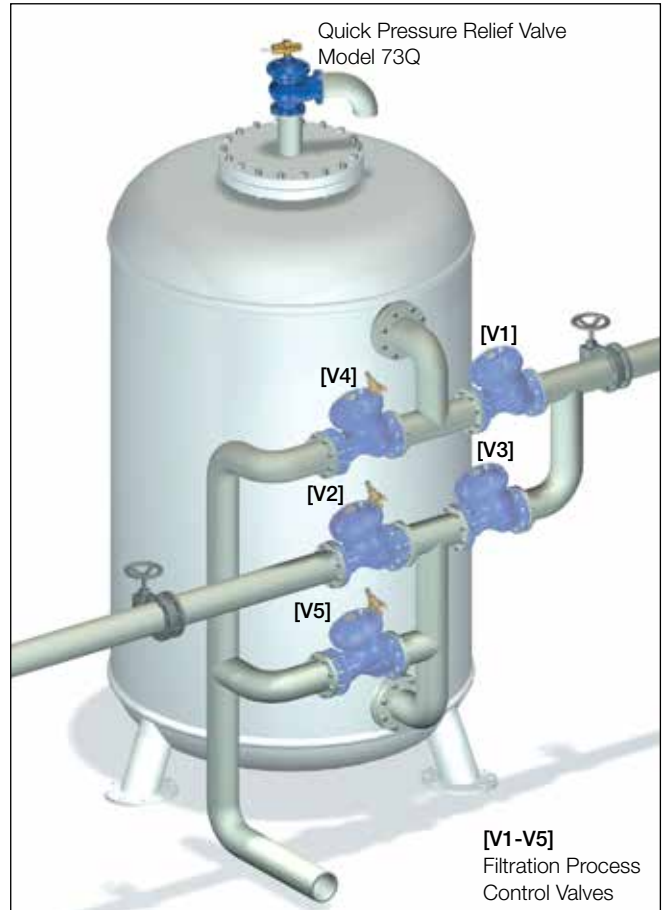



Technical Data

Size Range: DN40-900 ; 1/2-36"

End Connections (Pressure Ratings):

Flanged: ISO PN16, PN25 (ANSI Class 150, 300)

Threaded: BSP or NPT

Others: Available on request

Valve Patterns: "Y" (globe) & angle, globe (DN600-900 ; 24"-36")

Working Temperature: Water up to 80°C ; 180°F

Standard Materials:

Body & Actuator: Ductile Iron

Internals: Stainless Steel, Bronze & coated Steel

Diaphragm: Synthetic Rubber Nylon fabric-reinforced

Seals: Synthetic Rubber

Coating: Fusion Bonded Epoxy, RAL 5005 (Blue) approved for drinking water or Electrostatic Polyester Powder

Differential Pressure Calculation

$$\Delta P = \left(\frac{Q}{Kv; Cv} \right)^2$$

ΔP = Differential Pressure for fully open valve (bar; psi)

Q = Flow rate (m³/h; gpm)


Kv = Metric system - valve flow coefficient (flow in m³/h at 1 bar ΔP with 15°C water)

Cv = US system - Valve flow coefficient (flow in gpm at 1 psi ΔP with 60°F water)

$$Cv = 1.155 Kv$$

Flow Data & Dimensions Table

DN / Size		40	1.5"	50	2"	65	2.5"	80	3"	100	4"	150	6"	200	8"	250	10"	300	12"	350	14"	400	16"	450	18"	500	20"		
Flow Data	700 & 700ES	Kv / Cv - Flat																											
	700 & 700EN	Kv / Cv - "Y" Flat																											
	700 & 700EN	Kv / Cv - "Y" V-Port																											
700-ES	PN16; 25	L (mm / inch)																											
		W (mm / inch)																											
		h (mm / inch)																											
		H (mm / inch)																											
		Weight (Kg/lb)																											
700-EN	PN16; 25	L (mm / inch)																											
		W (mm / inch)																											
		h (mm / inch)																											
		H (mm / inch)																											
		Weight (Kg/lb)																											
700 Flanged	"Y" PN16 Class 150	L (mm / inch)																											
		W (mm / inch)																											
		h (mm / inch)																											
		H (mm / inch)																											
		Weight (Kg/lb)																											
	"Y" PN25 Class 300	L (mm / inch)																											
		W (mm / inch)																											
		h (mm / inch)																											
		H (mm / inch)																											
		Weight (Kg/lb)																											
700 Threaded	"Y" PN16; 25 Class 150; 300	L (mm / inch)																											
		W (mm / inch)																											
		h (mm / inch)																											
		H (mm / inch)																											
		Weight (Kg/lb)																											
	Angle PN16; 25 Class 150; 300	L (mm / inch)																											
		W (mm / inch)																											
		R (mm / inch)																											
		h (mm / inch)																											
		H (mm / inch)																											

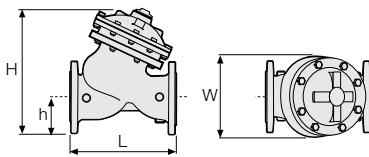

Specify when ordering:

- Size
- Main model
- Additional features
- Pattern
- Body material
- End connection
- Coating
- Voltage & main valve position
- Tubing & Fittings materials
- Operational data (according to model)
- Pressure data
- Flow data
- Reservoir level data
- Settings

* Use BERMAD's Waterworks Ordering Guide

DN / Size		600	24"	700	28"	750	30"	800	32"	900	36"
Globe PN16 Class 150	L (mm / inch)	1,450	57.1	1,650	65	1,750	68.9	1,850	72.8	1,850	72.8
	W (mm / inch)	1,250	49.2	1,250	49.2	1,250	49.2	1,250	49.2	1,250	49.2
	h (mm / inch)	470	18.5	490	19.3	520	20.5	553	21.8	600	23.6
	H (mm / inch)	1,965	77.4	1,985	78.1	2,015	79.3	2,048	80.6	2,095	82.5
	Weight (Kg/lb)	3,250	7,150	3,700	8,140	3,900	8,580	4,100	9,020	4,250	9,350
Globe PN25 Class 300	L (mm / inch)	1,500	59.1	1,650	65	1,750	68.9	1,850	72.8	1,850	72.8
	W (mm / inch)	1,250	49.2	1,250	49.2	1,250	49.2	1,250	49.2	1,250	49.2
	h (mm / inch)	470	18.5	490	19.3	520	20.5	553	21.8	600	23.6
	H (mm / inch)	1,965	77.4	1,985	78.1	2,015	79.3	2,048	80.6	2,095	82.5
	Weight (Kg/lb)	3,500	7,700	3,700	8,140	3,900	8,580	4,100	9,020	4,250	9,370

